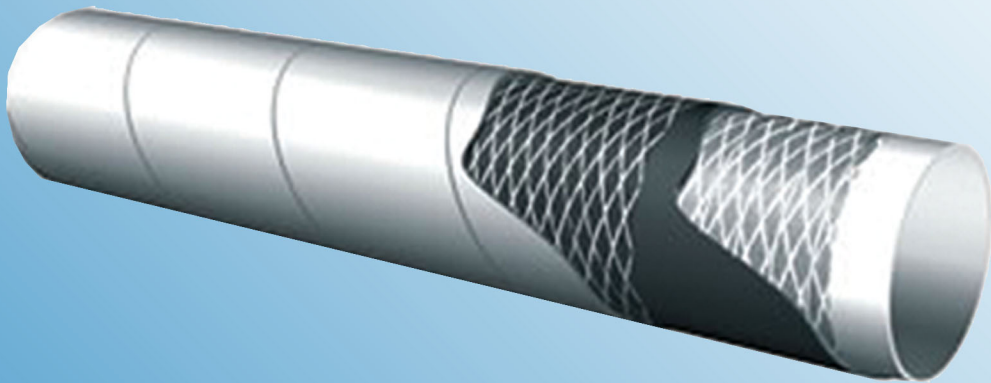


SEAFLOW

SANITATION HOSE (WC)



APPLICATION

Suitable for craft marine toilets. The special inner avoid the spreading of bad odours from the toilet drain. It is extremely flexible for guarantee special bending radius inside the structure of the craft.

CONSTRUCTION

Lining: Black butyl rubber

Reinforcement: Synthetic textile fabrics and built in steel spiral.









Cover: Grey EPDM, abrasion, ozone, weather resistant rubber.

Temperature: Min: -40°C - max. 120°C

PARCELLING

Printing: 'EUROCORD-SANITARI/WC WATER SUCTION DELIVERY'

Packing: Transparent polyethylene

Inside Diameter	Outside Diameter	Operating Pressure	Burst Pressure	Intake	Weight	Bending radius	Length
 mm	 mm	 bar	 bar	 bar	 Kg/mt	 mm	 mt
19	29	5	15	0,8	0,500	60	40
25,4	35	5	15	0,8	0,580	80	40
30	40	5	15	0,8	0,795	95	40
38	48	5	15	0,8	0,920	120	40
40	49	5	15	0,8	0,970	130	40
50	61	5	15	0,8	1,312	175	40



For any further information, please do not hesitate to contact us

Tel: 01502 716 993 Local Rate: 0845 1300 870

Fax: 01502 711 680 FREE Sales Fax: 0800 316 2727

www.asap-supplies.com Email: sales@asap-supplies.com